




GENERAL NOTES:

- 1. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
- 2. EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
- 3. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
- 4. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT (I.E. SPREADER BAR)

MODIFIED AS REQUIRED

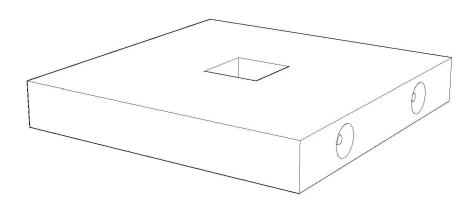

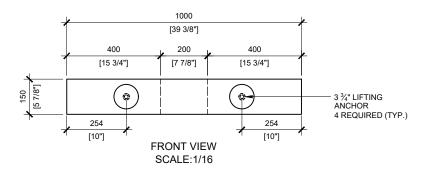

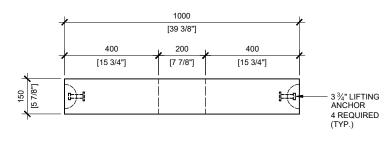

RIGHT VIEW SCALE:1/16



MANUFACTURED: BROOKLIN, ON 1-800-655-3430 CONCRETE: 35MPa / 5,000PSI
AIR ENTRAINMENT: 5-8%

REINFORCEMENT: STEEL TO CSA CAN A23.1 / A23.3. G30.18 Fy=400MPa WEIGHT:

BCP201EV - 783lbs / 355kg

DRAWN BY: N.CHAN BCP201EV

DATE: FEB/2021 PRECAST SLAB FOR ELECTRIC VEHICLE CHARGING STATIONS