
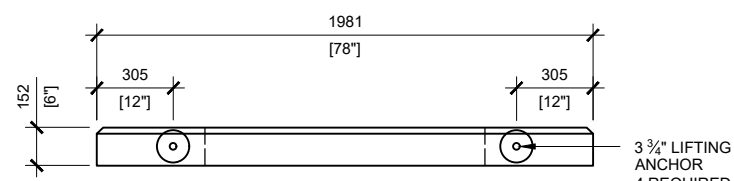


3 3/4" LIFTING ANCHOR
4 REQUIRED (TYP.)

TOP VIEW
SCALE:1/30


GENERAL NOTES:

1. DELIVERY IS MADE BY CRANE-EQUIPPED TRUCKS
2. EXCAVATION MUST BE READY, SAFE AND ACCESSIBLE FOR UNLOADING FROM THE REAR OF THE TRUCK.
3. MIN OVERHEAD CLEARANCE OF 18FT (5.5 METRES) IS REQUIRED
4. ALL UNITS MUST BE HANDLED WITH PROPER LIFTING EQUIPMENT (I.E. SPREADER BAR)

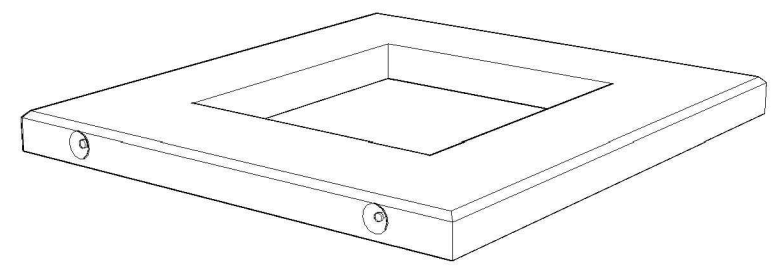

3 3/4" LIFTING ANCHOR
4 REQUIRED (TYP.)

FRONT VIEW
SCALE:1/30

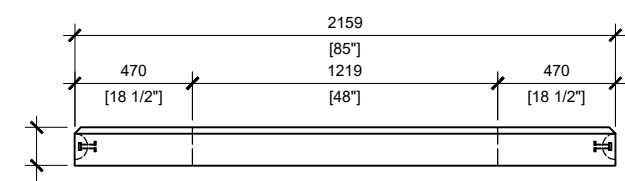

RIGHT VIEW
SCALE:1/30



MANUFACTURED:
BROOKLIN, ON
1-800-655-3430

CONCRETE: 35MPa / 5,000PSI
AIR ENTRAINMENT: 5-8%
REINFORCEMENT : STEEL TO CSA
CAN A23.1 / A23.3. G30.18 Fy=400MPa

WEIGHT:
BCP330TH - 2,328lbs / 1,056kg

DRAWN BY:
N.CHAN

DATE:
MAY/2020

BCP330TH

PRECAST TOP FOR TRANSFORMER FOUNDATION